

ELF NORGE

# FRIGG SITE


ALIGNMENT SHEET

FP TO TPI

SHEET 2

SCALE: HORIZONTAL: 1/2000\*  
VERTICAL: 1/125\*



DRAWN BY SCOP OCEANOGRAPHIE



LEGEND

- 1 : 24' FLARE LINE
- 2 : 2" PILOTE LINE & 2" AIR LINE

- Clay
- Sand

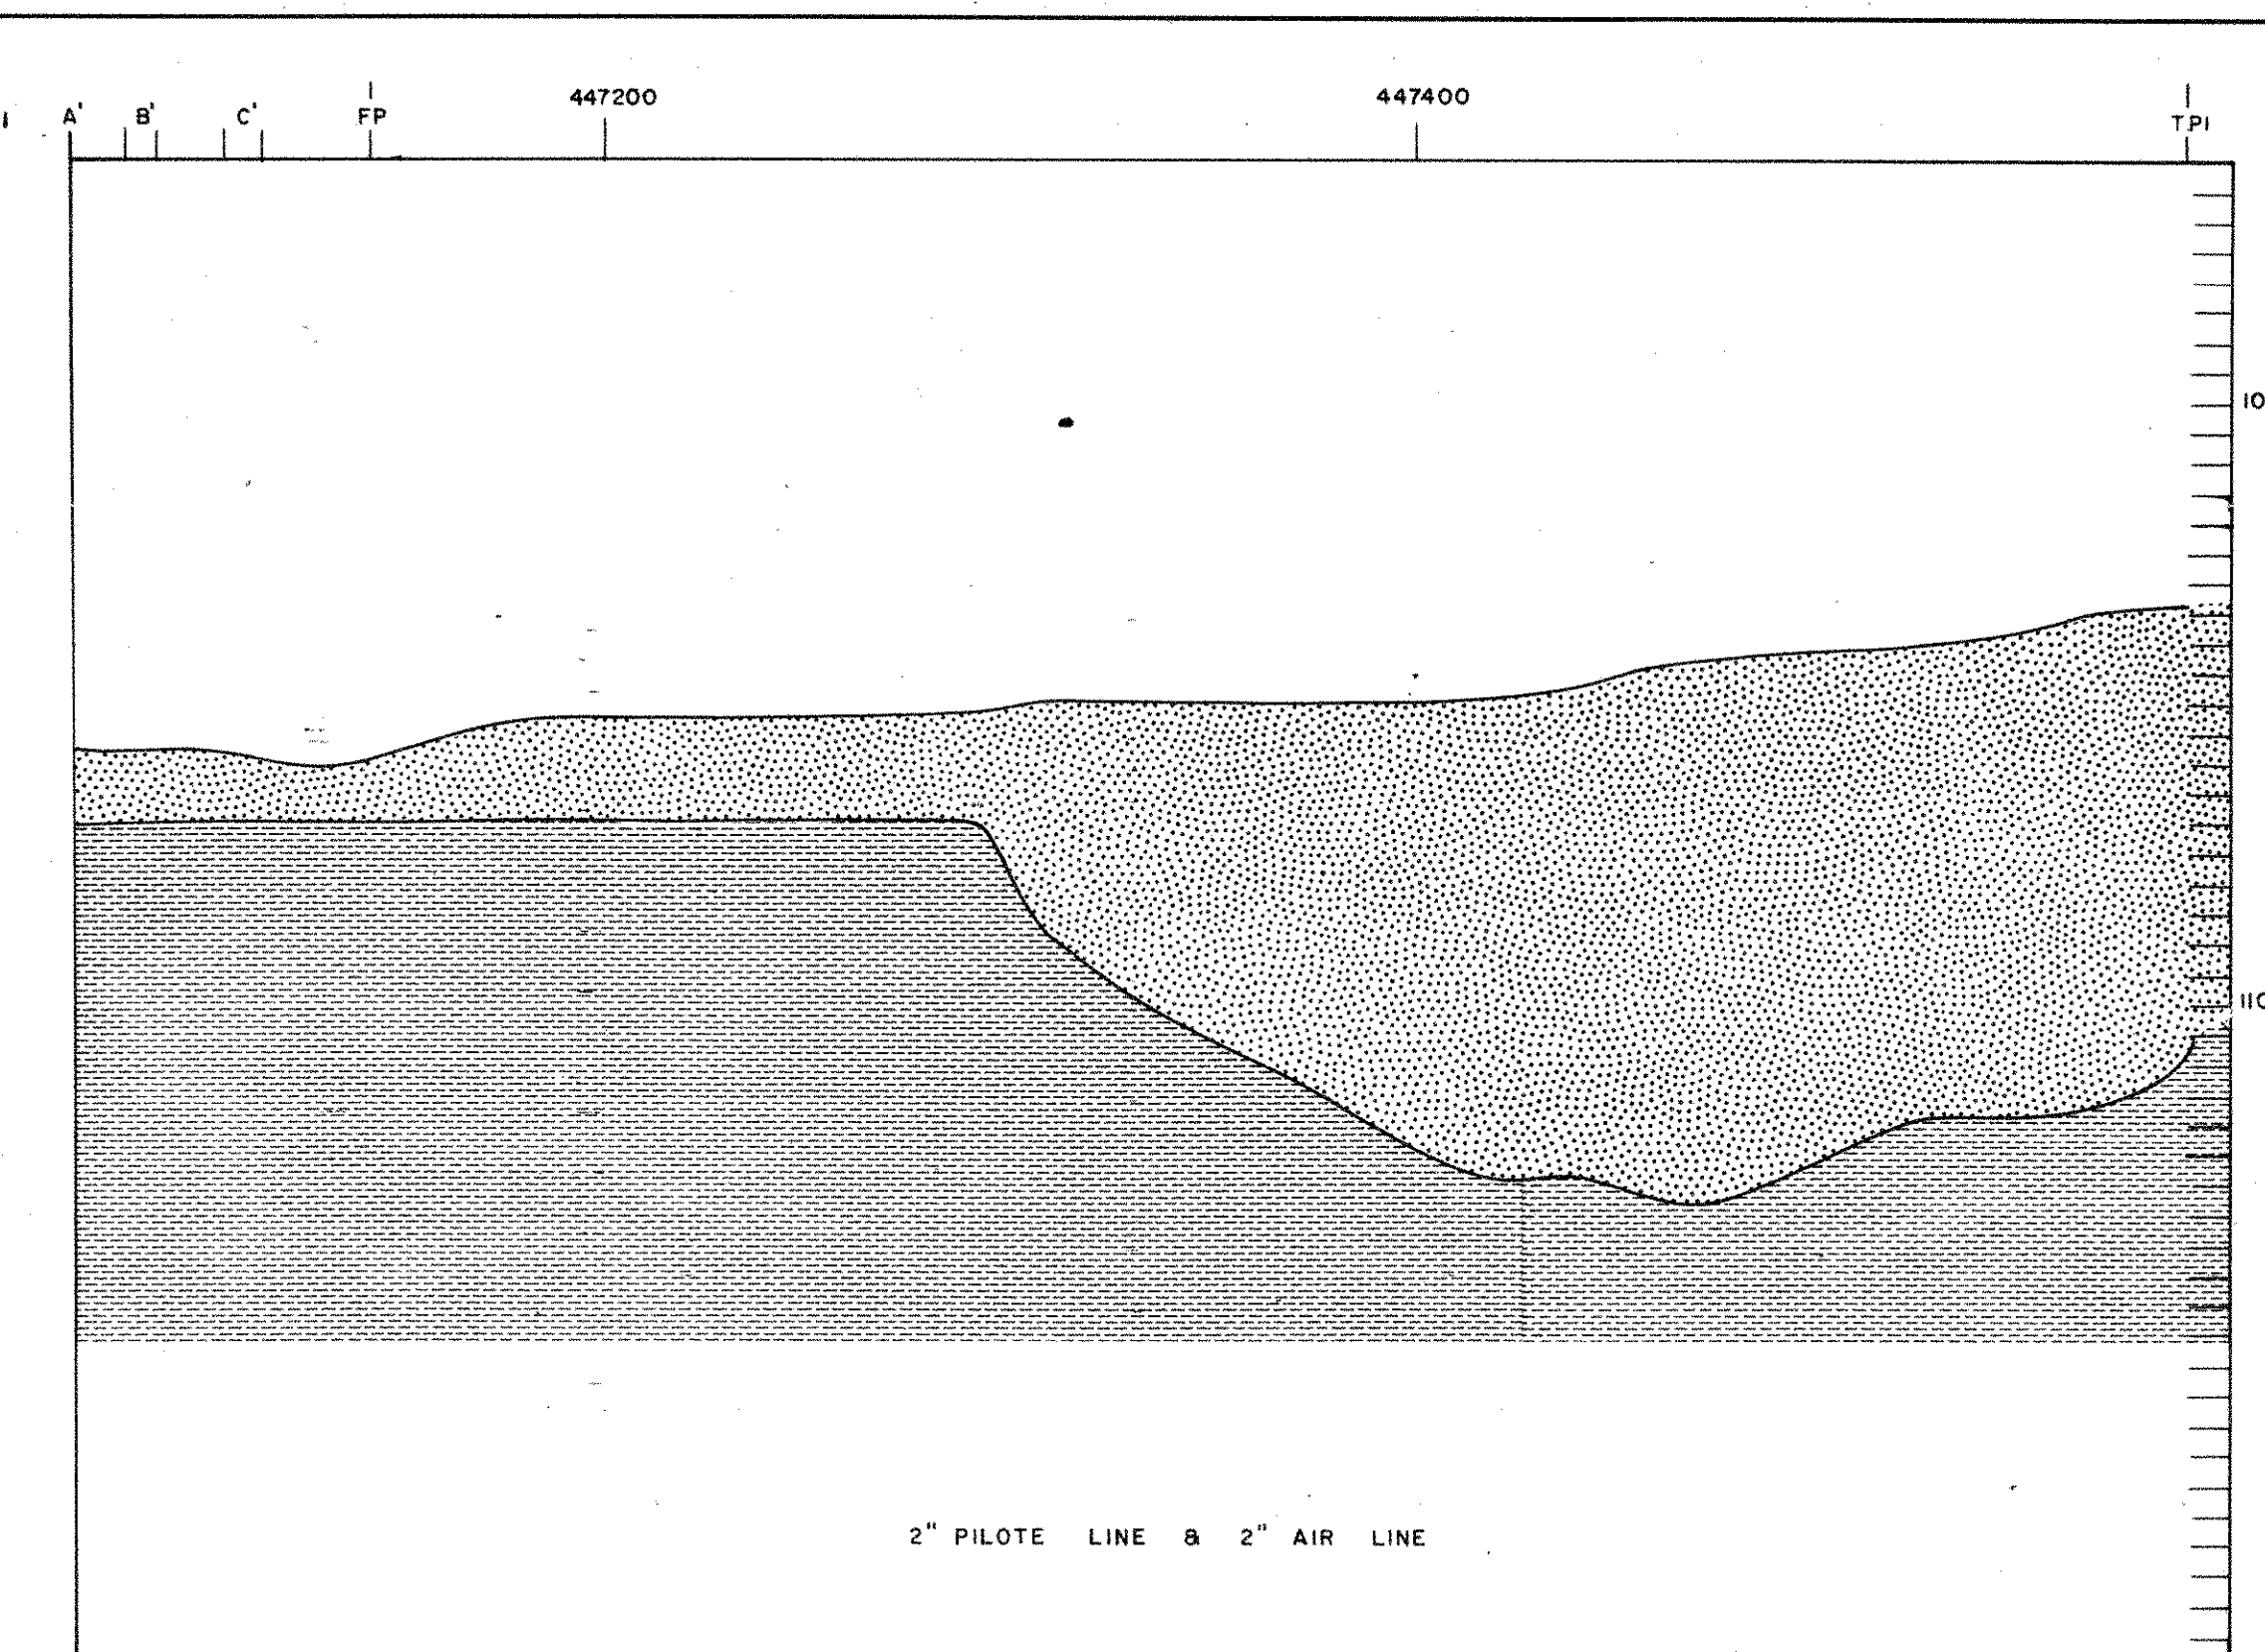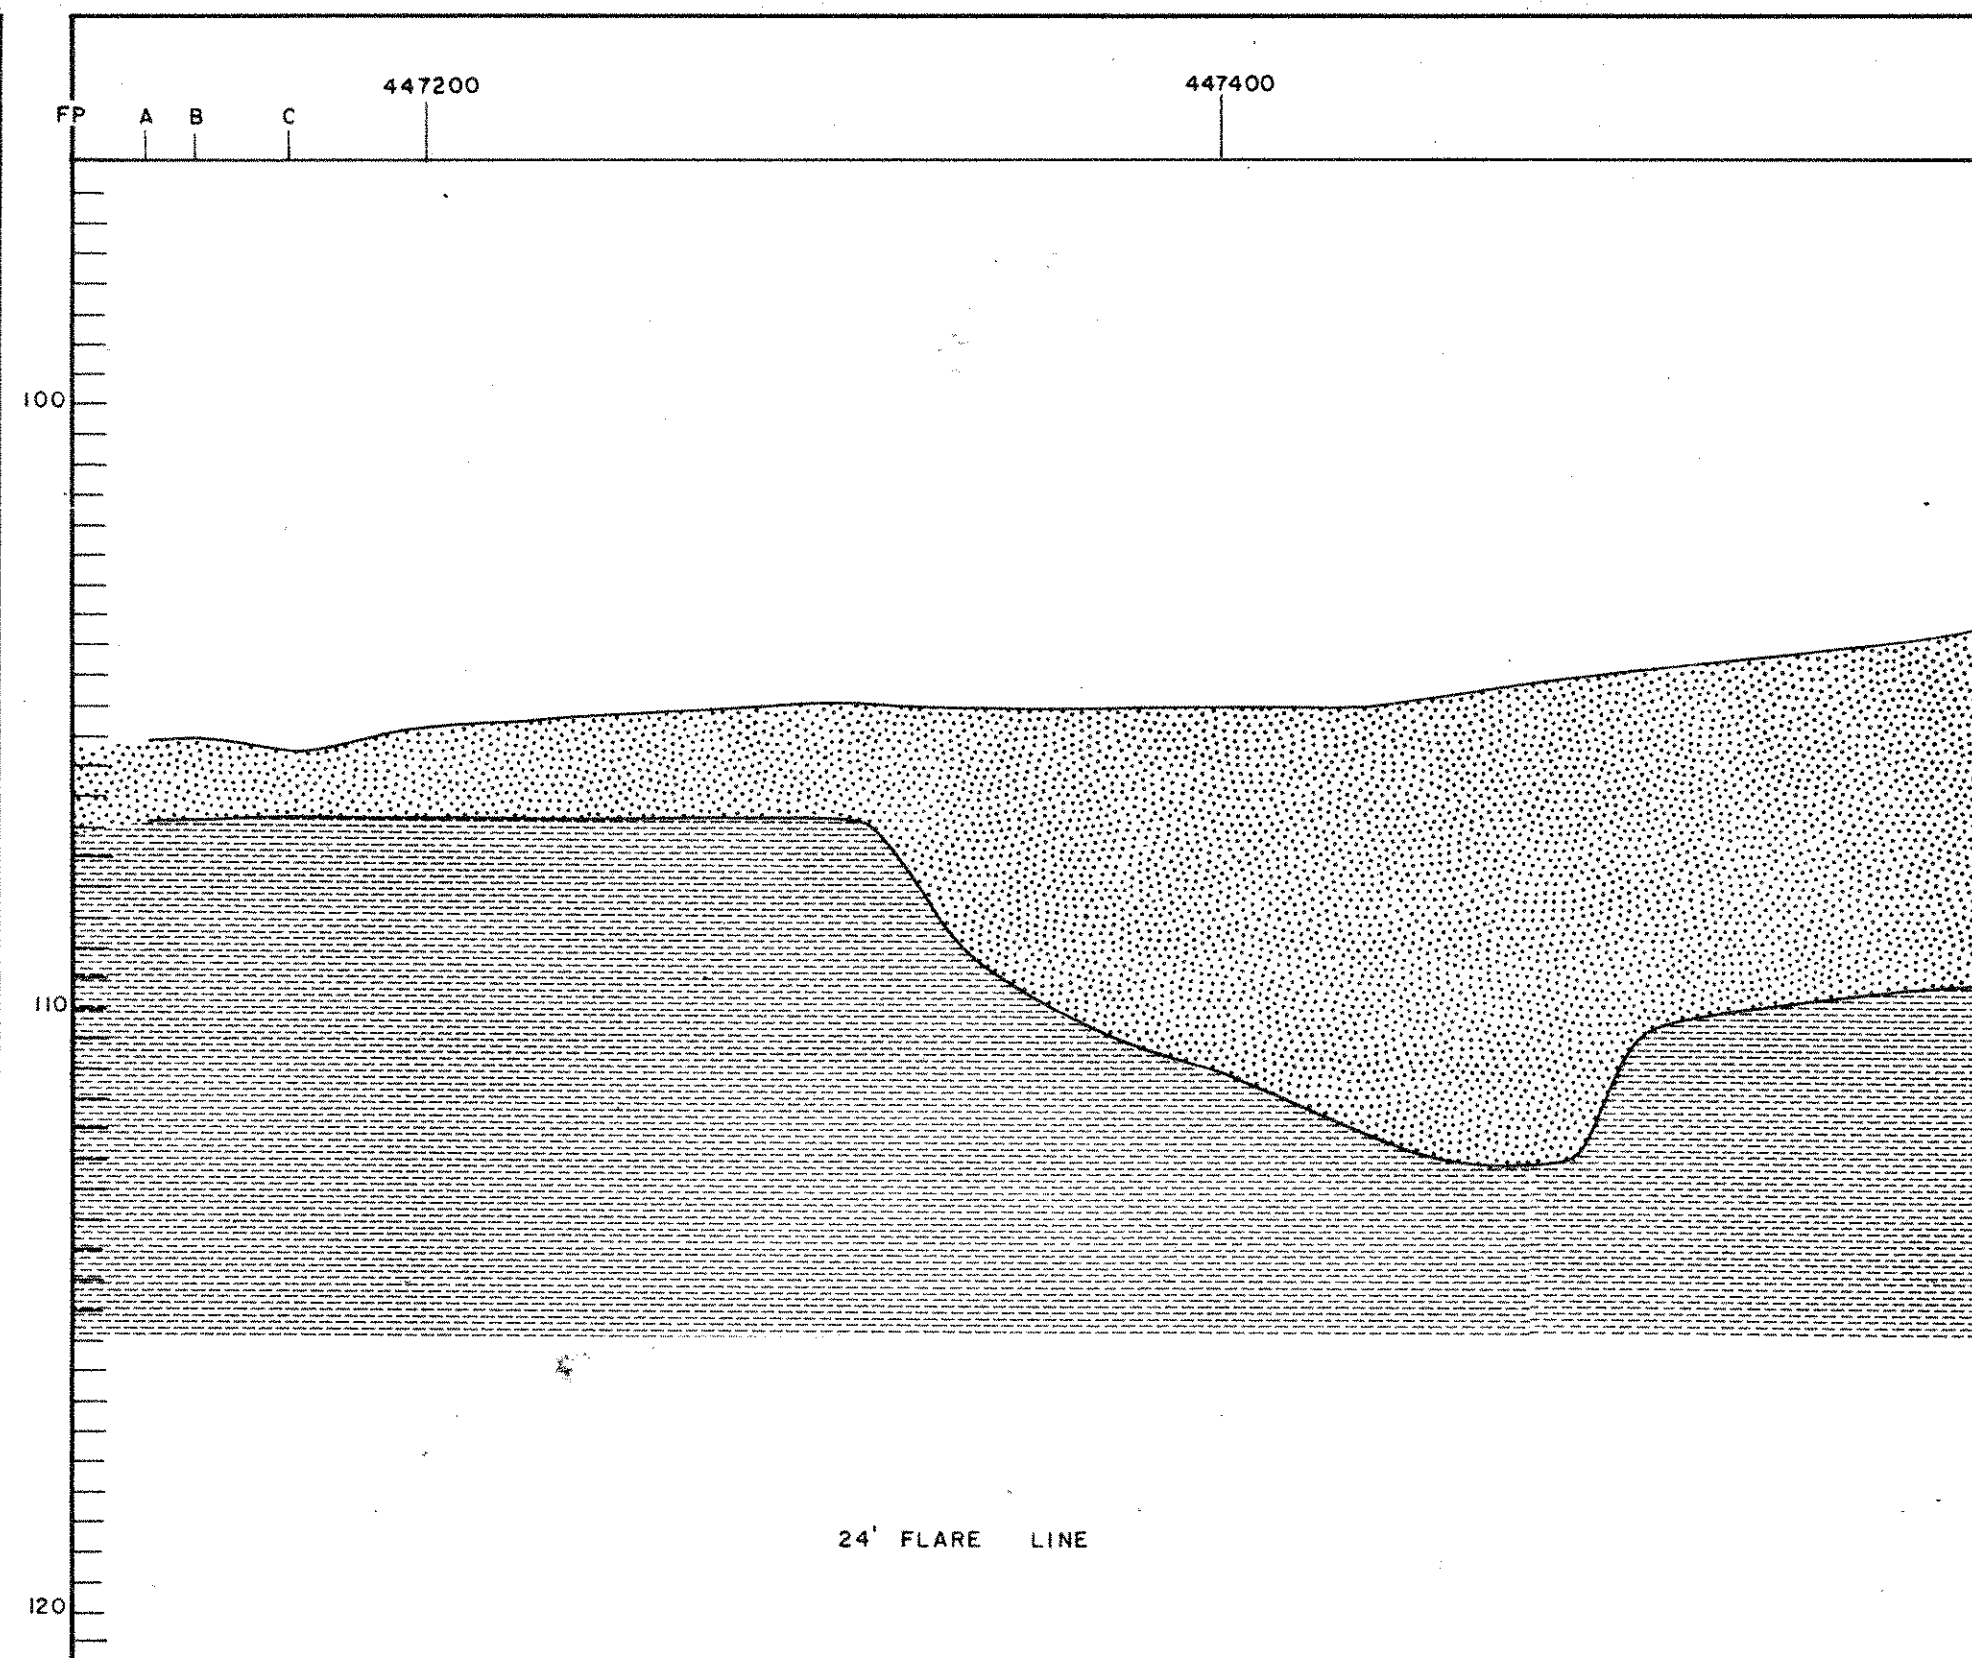

		CHAINAGE (M. HORIZ)	
24" FLARE LINE CONCRETE COATING SPECIFIC GRAVITY.		2" PILOT LINE + 2" AIR LINE	
24" O.D. x 0.625" W.T. GRADE 60.		2 3/8" O.D. x 2.18 W.T. API 5LX GRADE 52.	
THICKNESS = 2.46" DENSITY = 140 lbs/cuft.		NONE.	
68.5 lbs/ft.run		3.4 lbs/ft.run.	
1.23		2.30	
548 lbs. ZINC BRACELETS.		44.0 lbs. ZINC BRACELETS.	
9 ANODES EQUALLY SPACED ON CONTRACTION LOOP.	5 ANODES SPACED APPROX. EVERY 45M.	13 ANODES SPACED APPROX. EVERY 12M.	7 ANODES EQUALLY SPACED ON EACH LINE.
			21 ANODES SPACED APPROXIMATELY EVERY 7M ON EACH LINE.

NOTE: PIPELINE DATA ADDED BY B&R 30-1-76

DRAWING N°: PL. L 108 REV: 0